


# SUBMERSIBLE SITE DRAINAGE

## LB

### SINGLE PHASE

- Hire fleets
- Construction
- Utilities
- Dewatering
- Fixed installations
- Water features

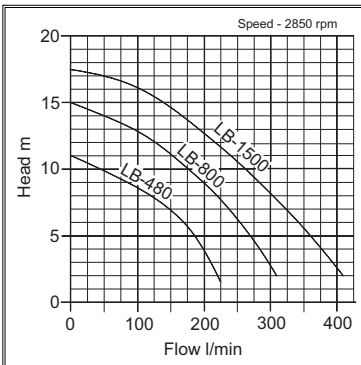

The LB series are extremely robust, compact contractor pumps, that have a 50mm (2") outlet and a tough pressed steel strainer base and body. A choice of 0.48kW, 0.75kW and 1.5kW motors assist cost effective pump selection. They all offer excellent durability during periods of continuous use and/or operator abuse. The LB480 and LB800 models incorporate a dual position outlet port, to enable the user to position the outlet hose horizontally or vertically and avoid it kinking, while the LB1500 has a single position outlet only. A combination of a rubber pump chamber, rubber wear plate and a urethane (chromium iron on LB1500) vortex impeller provides excellent wear resistance in site water applications that contain sand and silt in suspension, thus maintaining performance and reliability. All three models use a 403 stainless steel shaft that is fitted with an ultra hardwearing, silicon carbide, double mechanical seal, (in an oil chamber), with an oil lifter to maintain seal lubrication during operation in any position. This feature, combined with the water and air cooling route to the top outlet, allows the pump to operate for extended periods while pumping small amounts of water. Considered the "hire industry standard", earlier models of the LB480 have been used in this trade since the mid 1970's. Supplied with 10 metres of heavy duty rubber power cable. Available in single-phase only, with an optional float switch on the LB480 and LB800.

**TSURUMI PUMP**



**LB-480 manual**



**LB-800 manual**



**LB-480 auto**



**LB-1500**

item code	model	Manual or Auto	outlet (mm/BSPM)	kW	volt	flow (l/min)	head (mtrs)	free passage (mm)	dia x h (mm)	dry weight (kgs)	Price (£)	code
10-10-1115	LB-480	M	50	0.48	110	225	11	6	Ø187x275	10.40	330.00	2
10-10-1118	LB-480	M	50	0.48	230	225	11	6	Ø187x275	10.40	330.00	2
10-10-1178	LB-480	A	50	0.48	110	225	11	6	Ø187x275	10.80	362.00	2
10-10-1203	LB-480	A	50	0.48	230	225	11	6	Ø187x275	10.80	362.00	2
10-10-1129	LB-800	M	50	0.75	110	310	15	6	Ø187x341	13.00	545.00	2
10-10-1094	LB-800	M	50	0.75	230	310	15	6	Ø187x341	13.00	545.00	2
10-10-1130	LB-800	A	50	0.75	110	310	15	6	Ø187x341	13.40	578.00	2
10-10-1022	LB-800	A	50	0.75	230	310	15	6	Ø187x341	13.40	578.00	2
10-10-1087	LB-1500	M	2"	1.50	230	420	17.5	6	Ø187x600	32.50	1,538.00	2